

1




Insert lamp arm and bracket in desired position within top channel of the horizontal profile.

2



Bracket will support lamp assembly as pictured.

3

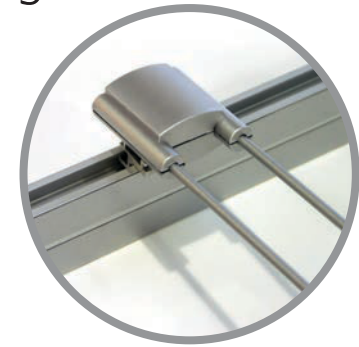

Repeat for other lamps and adjust head angle to desired position.

Plug power lead (supplied) into rear of lamp and appropriate power supply.

PRECAUTION: Turn the power off and allow to cool before adjusting position of light source