



Lockable FlameShield Noticeboards.

Board core substrate is fire rated material and is both stable and hard wearing. Fabric cover is fire rated. Aluminium frame is anodised and has rounded safety corners. The fire rated PETG locking hinged door is

virtually shatterproof. The internal clearance between door and board surface is 20mm. Single door models can be fixed either portrait style or landscape and door is hinged to the long edge. Twin door models can only be fitted landscape. Wall fixings are included. This product is guaranteed for 2 years. Top hinged version also available at an additional cost.

Surface/Area size (mm): 900x600, 1200x900, 1200x1200, 1800x1200, 2400x1200

Size Depth(mm): 40

Internal Clearance(mm): 20

Frame Material: Anodised Satin Silver Aluminium

Core Material: 9.5mm FlameShield Fire Panel

Door Material: PETG

Colour Options: See colour chart

Fabric/Surface Options: Accents Fabric

Weight (kg): 6-24kg

Fire Proof: Class 0 (B) - Substrate, Class 1Y Door


Top Hinged Door Option: Yes (Additional Cost)

British Made: Yes

FSC/Recycled: Yes, Board core

Guarantee: 2 years

More sizes available on special order: yes

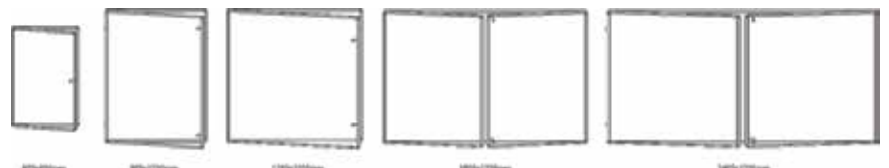

Standards: Bonded Textile Noticeboard Core certified to BS 476 Part 6 and 7 Class 0,

Bonded Textile Noticeboard Core certified to BSEN 13501 Class B-s1-d0

Lockable Door certified to BS 476 Part 7 Class 1Y,