


Lockable FlameShield Noticeboards. Board core substrate material is fire rated, stable and hard wearing. Fabric cover is fire rated. Aluminium frame is anodised and has rounded safety corners. The fire rated polycarbonate locking hinged door is virtually shatterproof. The internal clearance between door and board surface is 20mm. Single door models can be fixed either portrait style or landscape and door is hinged to the long edge. Twin door models can only be fitted landscape. Wall fixings are included. This product is guaranteed for 2 years.

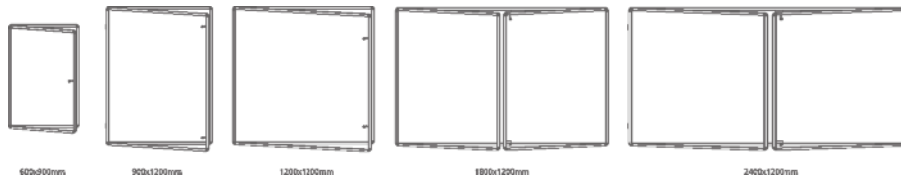

Surface/Area size (mm): 900x600, 1200x900, 1200x1200
1500x1200, 1800x1200, 2400x1200
Size Depth (mm): 40
Internal Clearance (mm): 24
Frame Material: Anodised Satin Silver Aluminium
Core Material: 8mm PVC CoExtruded Foam Core
Door Material: Poly Carbonate
Torsion/Max Load: n/a
Magnetic: No
Colour Options: Red, Blue, Grey, Green
Fabric/Surface Options: Hessian
Weight (kg): 5-14kg
Fire Proof: Class 0 (B)

Flip Chart: No
Weatherproof: No
Mobile/Locking Castor: No
Self Assembly: No
Heavy Duty: No
Adjustable: No
Guarantee: 2 years
Quick Ship: No
Storage/Stackable: No
More sizes available on special order: Yes

British Made: Yes
FSC/Recycled: Yes, Board core

Standards: Shatterproof 3mm PET clear glazing panel Fire certified to BS476 Class 1 Y (Woven) to BS5867 Part 2 1 980 and BS467 Part 7 Class 1) - EN1 3501 -1 : 2007 BS EN 1 3823:2002 and BS EN11 925-2 or equivalent BS EN ISO 1 05-B02: 1 999, Colourfast to BS 1 006 Level 5 / 6 (Felt) Fire retardant to BS5867 Part 2 1 980, (Woven) to BS5867 Part 2 and BS467 Part 7 Class 1 , EN1 3501 -1 : 2007 BS EN 1 3823:2002 and BS EN11 925-2