

1

Fully remove security screw in rear of enclosure using key provided and lift fascia clear.

If you are not using cable management for charging, please proceed to stage 3.



2

Feed charge/sync cable through central holes in unit, so it protrudes from the enclosure and base.



3




If applicable, plug charge/sync cable into tablet.
Place tablet inside enclosure ensuring it is centrally positioned within the relevant corner mouldings.

4



Replace fascia, re-insert and tighten security screw to secure.

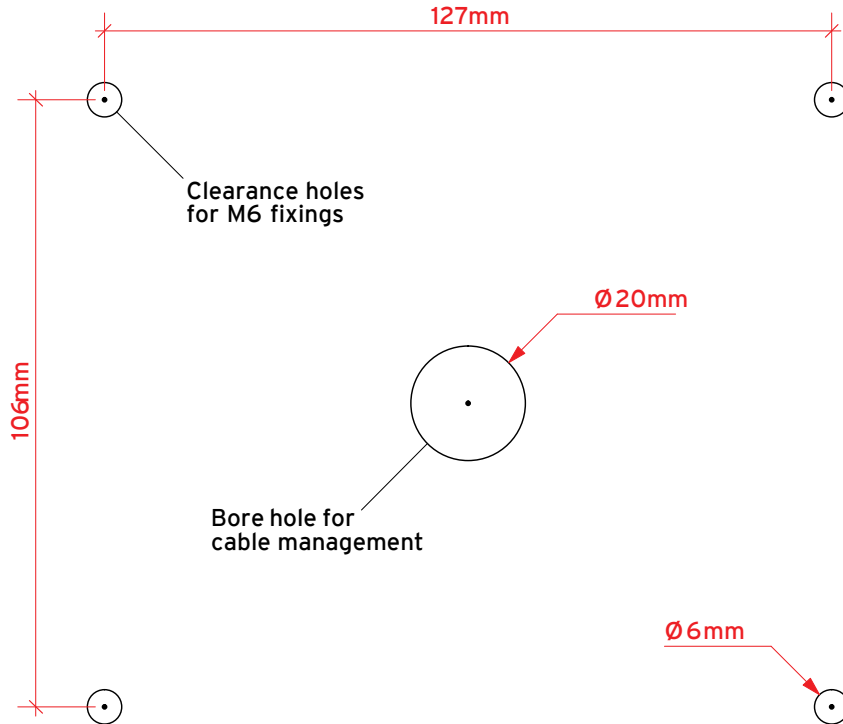

Template for optional screw mounting